




DG4000i NEW


Inverters Range



 POWER (PRP / ESP):
3000 r.p.m

 FREQUENCY
50Hz


 VOLTAGE
230V

 WEIGHT WITH WHEELS:
52kg

 DIMENSIONS WITH WHEELS:
L: **665 mm**
W: **485 mm**
H: **545 mm**

Image for orientation purposes. Dagartech reserves the right to modify the data in this technical sheet without prior notice.

 Unleaded gasoline

 Air-cooled

 Moving chassis

 CE certified

1. Technical data

1.1. General technical data

Engine	DAGARTECH SV230 (223cc)
Frequency	50Hz
Voltage	230V
Work regime (rpm)	3000
Insulation class	H
Noise Level (1/4 load, 7 m)	58
Fuel tank capacity (l)	10
Type of start-up	Manual

1.2. Power (p.f. cos φ 1)

Nominal Power (kVA)	Starting Power (kW / kVA)
3,5 / 3,5	3,8 / 3,8

1.3. General technical data of the engine

Make and model	DAGARTECH SV230 (223cc)
r.p.m.	3000
Continuous power · 3,000 rpm (kW)	3500
Max. net power · 3600 rpm (kW)	4000
Fuel	Petrol
Fuel tank capacity (l)	10
Cylinder capacity (c.c.)	223
Cooling system	Air cooling
Oil type	SAE10W-30
Oil capacity (l)	0,6

1.4. General technical data of the alternator

Total Harmonic Distortion (THD)	< 3%
Insulation class	H

The equipment is supplied with a transport kit, included in the standard scope of delivery.

Consumption and autonomy

	Consumption (l/h)	Autonomy (h)
50%	1,1	9
100%	1,8	5,5

230V · 50Hz (3000 rpm)

DAGARTECH SV230 (223cc)

Why choose our inverters?




The transport kit is included in the standard scope of supply of the equipment.

- ✓ **PowerPulse Technology.** Increasing your start-up capacity
- ✓ **Low fuel consumption.** With load-dependent variable speed motors.
- ✓ **Lighter and more compact.** Easy to transport, featuring wheels and a telescopic handle.
- ✓ **Silent operation.** With noise levels below 65 dB.

And also...

You can extend its functionalities with the addition of a parallel Kit (see page 3).

 Please confirm the availability of the parallel option for this model.



DO YOU HAVE ANY QUESTIONS ABOUT THE PERFORMANCE OF THIS EQUIPMENT? DO YOU NEED ADVICE?

Get in touch with us.
We'll answer all your questions.

Write to us at
info@dagartech.com

Call us at:
+34 976 141 655




2. Standard Scope of Delivery

DETAILS OF THE SCOPE OF SUPPLY

Supply without engine lubrication oil



Engine oil protection

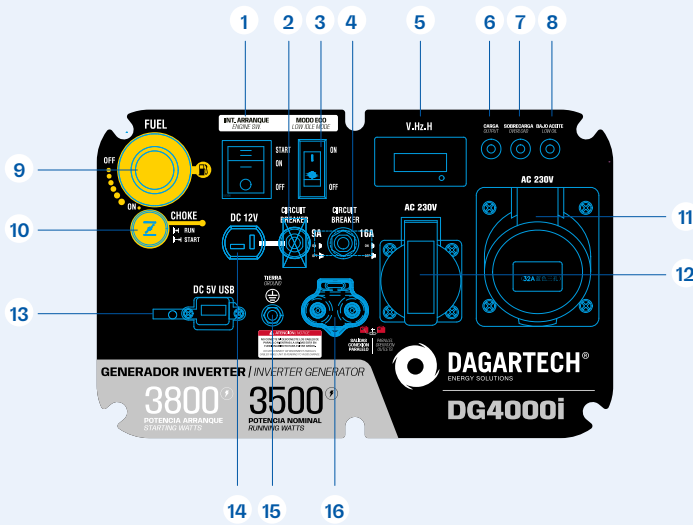


- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Starter circuit breaker 2. 9A circuit breaker 3. ECO mode 4. 16A circuit breaker 5. Data centre LED display 6. Indicador - Carga 7. Overload indicator 8. Low oil level indicator | <ol style="list-style-type: none"> 9. Fuel switch 10. Choke 11. 32A, 230V AC power socket 12. Schuko socket 230V AC 13. 5V/1.5ACC USB socket 14. Battery power supply 12V / 8.3A DC 15. Grounding 16. Parallel kit connection outputs |
|---|---|

3. Available options

Parallel kit

Possible to operate two units in parallel for up to 6000W, as a convenient and efficient way of increasing the power output.

 Available for DG2300i and DG4000i models.



Do you need to add other features to this equipment? Can't find what you're looking for?
Contact us and tell us what you need.





DAGARTECH®

CUSTOM ENERGY SOLUTIONS

info@dagartech.com

T +34 976 141 655



**CUSTOM
ENERGY
SOLUTIONS**

dagartech.com